

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)



GB 99/01756

The
Patent
Office

PCT/GB 99 / 0 1 7 5 6

04

JUNE

1999



5

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 19 JUL 1999

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Gersy

Dated

22 June 1999

THIS PAGE BLANK (USPTO)


9812026.4

05JUN98 E365678-3 D02866
P01/7700 25.00 9812026.4

- 5 JUN 1998

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

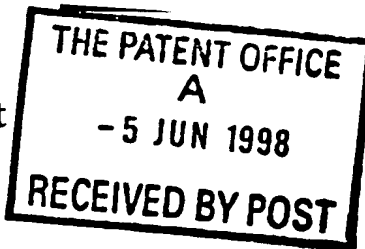

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

PENE\P19093GB

2. Patent application number

(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Courtaulds Textiles (Holdings) Limited
13/14 Margaret Street
London
W1A 3DA
United Kingdom

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

0564144404

4. Title of the invention

VENTILATOR FABRIC

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ERIC POTTER CLARKSON
PARK VIEW HOUSE
58 THE ROPEWALK
NOTTINGHAM
NG1 5DD

Patents ADP number (if you know it)

1305010 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer yes if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

| | |
|-------------|-------|
| Description | 16 |
| Claim(s) | 4 |
| Abstract | 1 |
| Drawing(s) | 2 + 2 |

10. If you are also filing in any of the following, state how many against each item.

| | |
|---|-----|
| Priority Documents | 0 |
| Translations of priority documents | 0 |
| Statement of inventorship and right to grant of a patent (<i>Patents Form 7/77</i>) | NO |
| Request for preliminary examination and search (<i>Patents Form 9/77</i>) | YES |
| Request for substantive examination (<i>Patents Form 10/77</i>) | NO |
| Any other documents (<i>please specify</i>) | |

11. I/We request the grant of a patent on the basis of this application.

| | |
|----------------------|-------------|
| Signature | Date |
| ERIC POTTER CLARKSON | 4 June 1998 |

12. Name and daytime telephone number of person to contact in the United Kingdom
- 0115 9552211

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

FLEXIBLE SHEET MATERIAL AND METHOD OF MAKING SAME

5 This invention is concerned with flexible sheet material and method of making same.

 In caring for patients in hospital, pressure-sores (often called bed-sores and more correctly known as decubitus) are a potential problem.

10 Additionally patients may also be incontinent or have exuding wounds. To try to protect patients from the risk of pressure-sores and prevent fluid transfer to the underlying mattress and any resulting cross-infection, various sheets or cover sheets have been introduced. Such protective sheets are, of necessity, impermeable to fluids microbes and pathogens.

15 Moreover, to reduce the risk of pressure-sore development, the sheet needs also a certain amount of stretch, thereby reducing interface pressures on the patient's most vulnerable areas.

 To this end, varying solutions have been proposed, including both

20 "static" and "dynamic" systems. Whereas the static systems may operate as a sprung or foam block mattress with a cover sheet, the dynamic systems are inflatable and often consist of a series of cells, which are sequentially deflated so as to further reduce the interface pressure exerted on the various parts of the patient's body. Such mattresses have been

25 successful in reducing the incidence of pressure sores and inhibiting their progression.

 A further complication to this issue is that, as a result of the sheet cover being impermeable, the patient's skin can be in direct contact with

fluids, which can inhibit the healing process. For wounds (including pressure sores) to heal most effectively, they need to be exposed to a reasonable amount of air, and not left in contact with moisture.

5 In order for a material to be suitable for use as a protective mattress cover, it should preferably have the following properties: impermeability to liquid, good heat transmission, flexibility, resilience, stretch and recovery. This allows such materials to readily respond to the contours of the patient's body.

10

One of the various objects of the present invention is to provide a flexible sheet material through which air can be delivered.

Another of the various objects of the present invention is to provide
15 an improved flexible sheet material suitable for use as a mattress cover.

Another object of the present invention is to provide a flexible sheet material suitable for use as a patient-contacting sheet material to enable control of air transfer to regions of the sheet material which might come
20 into contact with a patient's body.

In one aspect the invention may be considered to provide a flexible sheet material comprising an air-permeable first layer and a second layer, the second layer being substantially air-impermeable but having a
25 controlled air permeability at a selected part of the second layer.

Preferably, the first and second layers are produced separately and the second layer (which is preferably of uniform thickness) is then laminated to the first layer. In a preferred sheet material in accordance

with the invention the second layer comprises an air-impermeable material having a set of perforations therethrough at the selected part.

5 Preferably, the first layer is a textile material, conveniently a relatively extensible, flexible and resilient textile material; suitably the textile material is preferably knitted (but may be woven or a 'non-woven' provided that they have the necessary characteristics - stretch is specially important) and is a relatively open textile material with high loft.

10 Preferably, the second layer is a relatively extensible, flexible and resilient impermeable plastics material, suitably a polyurethane composition. Such compositions are typically polyester or polyether prepolymers extended by means of aliphatic or aromatic polyisocyanates in combination with polyhydroxyl or polyamino compounds. The
15 resulting elastomers may be applied as solutions, emulsions, in molten or prepolymerised forms. The second layer is preferably of uniform thickness, to minimise the risk of any thin regions being present in the second layer which may lead to unwanted leakage through the second layer.

20

In a first sheet material in accordance with the invention the perforations are of different dimensions in a first region of the selected part from those in a second region, the perforations in the first region suitably being larger than those in the second region. Conveniently, the
25 perforations in the first region each have a diameter between 0.1 mm and 0.6 mm and the perforations in the second region have a diameter between 0.2 mm and 1 mm.

The airflow through the perforated regions of the sheet material in accordance with the invention is preferably sufficient to give satisfactory ventilation.

5 In the first sheet material in accordance with the invention the first region of perforations extends lengthwise along a central part of the sheet material and the second region extends lengthwise at either side of the central part. Conveniently, the central part is between 25 cm and 35 cm in width preferably about 30 cm. Conveniently each part of the second
10 region at either side of the first region is between 7.5 cm and 15 cm wide, preferably about 10 cm. The combined width of the first and second regions is preferably between 40 cm and 65 cm, more preferably between 50 cm and 60 cm. The perforations in the first region 18 are preferably between 0.1 mm and 1.6 mm in diameter, more preferably between 0.1
15 and 0.6 mm. In the second region the second perforations 20 are preferably between 0.1 and 1.6 mm in diameter, more preferably between 0.2 mm and 1 mm.

The first sheet material in accordance with the invention comprises
20 a third layer on a face of the first layer opposite that carrying the second layer, the third layer conveniently being formed separately from the first and second layers and laminated thereto. The third layer is air-impermeable and preferably of uniform thickness and in this first sheet material the first layer is permeable to air in a direction parallel to the
25 surface of the sheet material as well as in a direction extending transversely to the surface of the sheet material. Conveniently, the third layer is a polyurethane composition. Although polyurethane compositions are preferred for use as the second or third layers, other materials, for example PVC, synthetic rubber or acrylics, may prove suitable for use in

materials in accordance with the inventions provided that they have the necessary characteristics.

5 A second sheet material in accordance with the invention merely comprises the first and second layers, no third layer being included. The perforations in the second layer range between 0.1 and 1.6 mm in diameter, more preferably between 0.1 and 1 mm in diameter.

10 Although the perforations described herein are generally circular, other shapes might be used provided that their areas are appropriate. Thus, if other shapes are used in materials otherwise similar to the first or second materials, their areas may correspond with the areas of the preferred circular perforations.

15

In another aspect the invention may be considered to provide a method of making a laminated sheet material comprising:-

- (a) procuring an air permeable first layer;
- (b) procuring an air-impermeable second layer comprising a material of uniform thickness;
- (c) laminating the first and second layers to one another to provide said laminated sheet material; and
- (d) forming a set of perforations through the second layer at a selected part thereof.

25

Preferably, in carrying out a method in accordance with the invention the first layer is a textile material, preferably a knitted textile fabric which is of open construction and high loft and is flexible, resilient and extensible. Preferably, the second layer is an impermeable plastics

sheet material, suitably a polyurethane composition and is preferably flexible, extensible and resilient.

Preferably, the second layer is laminated with the first layer, more preferably by transfer coating but other laminating techniques may be used, eg. hot melt, adhesive spot techniques or pressure sensitive adhesive films. In transfer coating the second layer is formed by coating a support substrate, conveniently a release paper, with a layer of coating material of uniform thickness by any well known coating technique, the coating material conveniently being a polyurethane composition. The coating material is then cured or allowed to cure to form a flexible sheet of uniform thickness; more than one layer of coating material may be applied if desired. A thin adhesive (or tie) coat is then applied to the surface opposite the substrate and the first layer is brought into contact with the tie coat and pressed gently against it, thereafter being cured or allowed to cure to securely laminate the first layer and second layer to one another. Laminating by transfer coating avoids undue penetration of the first layer thus militating against undesirable reduction in flexibility or, extensibility resilience of the finished sheet material.

20

The perforations may be made by any suitable technique but are preferably made using a laser system after the first and second layers have been laminated to one another, the laser being chosen to perforate the second layer at selected positions but to not perforate or significantly affect the first layer. Although the perforations could be made whilst the second layer is still supported by the substrate prior to being laminated with the first layer, that is not preferred.

25

In perforating the second layer, the perforations are chosen to be such that the ratio of area of the perforations in the selected perforated part to the area of solid material in the selected part ranges between 1:5 cm² and 1:50 cm². However, the ratio of the area of the perforations to the area of the solid material of the selected part of the second layer may be varied according to the airflow which is desired through the perforations.

In a method in accordance with the invention of making the first sheet material in accordance with the invention, a third layer is laminated to a face of the first layer opposite that to which the second layer is laminated, preferably by transfer coating. The third layer is air-impermeable and of uniform thickness, to minimise the risk that unwanted leakage of air through the third layer may arise.

15

The second sheet material in accordance with the invention is produced by terminating the method after laminating the first and second layer and perforating the second layer.

20

Material in accordance with the invention may be used in the manufacture of cover sheets for mattresses and for other purposes where it is desirable to supply a controlled flow of air to preselected locations. For example, material in accordance with the invention comprising three layers may be utilised in the manufacture of a body suit with the second layer on the inside, for treatment of patients suffering from hypothermia where warm air may be supplied through the perforations to the interior of the suit.

There now follows a detailed description to be read with reference to the accompanying drawings of a flexible sheet material embodying the invention, and a method of making the sheet material likewise embodying the invention. It will be realised that the sheet material and methods have
5 been selected for description to illustrate the invention by way of example. Although the second and third layers of a preferred sheet material in accordance with the invention are of uniform thickness with a set of perforations through the second layer at a selected part, other materials having controlled air permeability may be used. For example such
10 materials (conveniently polyurethane compositions) may be made by coagulation techniques to form a microporous second layer, or other techniques for forming microporous sheet materials; such materials where construction permits, have characteristics similar to those referred to herein in respect of sheet material in accordance with the invention set out
15 in Claim 1.

Irrespective of the manner in which the sheet material is rendered air permeable, to deliver a controlled air flow it is important to select suitable air transmission characteristics at the selected part of the material. Thus,
20 for example, the air permeability should be sufficient to deliver a desired air flow rate eg. where the material is to be used to ventilate a patient.

Furthermore, where the material is to be used as a mattress cover the sheet material should be adapted to provide at least two lengthwise
25 extending air permeable regions, a first region extending along a central part of the sheet material and a second (or further) regions at either side of the central region; the central region conveniently has a greater air flow capacity than the second (or other) regions whereby to facilitate the

ventilation of desired parts of the body of a patient supported on the sheet material.

In the accompanying drawings:-

5 Figure 1 is a diagrammatic plan view showing a first sheet material embodying the invention; and

Figure 2 is a view of the first sheet material embodying the invention showing a perforated part of the material on a larger scale.

10 The first illustrative sheet material 10 is a flexible, resilient material and comprises an air permeable first layer 12 (see Figure 2). The first layer 12 is a loosely knitted high loft textile fabric which is relatively open in structure and is between 200 and 1000 micrometers in uncompressed thickness, more preferably between 200 and 600 micrometers and
15 conveniently about 400 micrometers; the thickness depends on the end use to which it is intended to put the material. The textile fabric which provides the first layer 12 is readily permeable to air considered in a direction parallel to the surface of the sheet material 10, as well as in a direction transverse to the sheet material 10.

20

The first layer 12 is laminated to a second layer 14 which is of uniform thickness but has a set of perforations 18, 20 extending through a selected part of the second layer 14. The selected part of the first sheet material 10 is indicated by dashed lines R which are parallel with opposite
25 parallel edges 16 of the sheet material. The perforations 18, 20 are of different dimensions and are grouped in two regions. A first, central region lies between lines S parallel with the lines R and extends lengthwise along a central part of the sheet material 10; the perforation 20 are disposed in the first region. The perforations 18 are disposed in a second

region which extends at either side of the first region lengthwise of the sheet material, the second region being disposed between one of the lines R and the adjacent line S. The perforations 20 in the first region are larger than those 18 in the second region and both sets of perforations are generally circular; however, the perforations may all have the same diameter or be of greater diameters according to the use to which the sheet material is to be put.

In the first illustrative sheet material the perforations 20 are preferably between 0.1 and 1.6 mm in diameter, more preferably between 0.2 and 1 mm in diameter. The perforations 18 are preferably also between 0.1 and 1.6 mm in diameter and more preferably between 0.1 and 0.6 mm in diameter.

The first illustrative sheet material further comprises a third layer 22 on the face of the layer 12 opposite the face carrying the second layer 14. The third layer is air-impermeable and provided by a polyurethane film of uniform thickness.

The second and third layers 14, 22 are conveniently of the same thickness (but may be of different thicknesses) preferably between 20 and 100 micrometers thick and more preferably between 20 and 60 micrometers thick, suitably about 40 micrometers.

The first illustrative sheet material further comprises larger openings 24 in marginal regions of the sheet material 10 adjacent the edges 16. The openings 24 conveniently are of about 30 mm diameter and the openings 24 in the second layer 14 may be provided by complete removal of the second layer 14 for the whole of the diameter of the

opening 24 or by a series of closely adjacent holes within the boundary defining the opening 24.

5 The first illustrative sheet material 16 has an air impermeable seal along the opposite edges 16.

A second sheet material embodying the invention is generally similar to the first illustrative sheet material described above except that the third layer 22 is omitted as are the openings 24 in the surface 14, and as is the impermeable seal along the edges 16, 26.

10

The first and second illustrative sheet materials are made by carrying out a method embodying the invention. In carrying out the first illustrative method a suitable air permeable textile fibre fabric is procured to provide the first layer. The textile fibre fabric is conveniently supplied
15 in a continuous length wound on a roll from which it is withdrawn to provide the first layer.

The second layer is made by coating a substrate with a layer of suitable polyurethane coating composition to provide on the substrate a
20 polyurethane composition coating having a uniform thickness. The substrate is suitably a paper with a release surface. The paper may conveniently be supplied from a roll and the polyurethane coating coated onto the release surface by known coating techniques. The polyurethane coating is then cured to provide on the substrate a film of polyurethane of
25 uniform thickness to form the second layer. If desired a plurality of separate polyurethane coatings may be applied to form a multi-coat second layer. The second layer is then coated with a thin tie coat which may be a further polyurethane composition (or other suitable adhesive eg. acrylic) but of much less thickness than the film which provides the second layer.

Whilst the tie coat is still in a soft and tacky condition it is brought into engagement with the first layer and gently pressed thereagainst, the tie coat then being cured to laminate the second layer 14 to the first layer. This method of applying a surface coating to a substrate is commonly referred to as transfer coating. The first and second layers may be laminated together in this way to provide a continuous laminated sheet material.

In making the first illustrative sheet material, in carrying out this illustrative method, a third layer 22 provided by a polyurethane composition is applied to the first layer on the opposite face from that on which the second layer 14 is applied by a transfer coating technique, similar to that of the lamination of the first and second layers; the second layer 14 will, usually, have been separated from the support substrate prior to laminating with the third layer.

15

The perforations 18, 20 (and where appropriate openings 24) are preferably formed in the second layer after it has been laminated to the first layer and has been separated from the release coat carried by the substrate on which the second layer is coated, but before the third layer is laminated on the opposite face of the first layer.

20

The second layer is perforated using a laser system which is able to perforate the second layer 14 at the required locations and with perforations of the required diameter, as the sheet material comprising the first and second layers is moved through the laser system operating simultaneously in line with the coating system (although this may be a separate, remote operation, if required), in a continuous production technique (rather than a batch processing technique). A suitable laser system is available from the Spanish company MACSA under the trade

25

name MAC2000 CO₂, which includes a CO₂ sealed laser having a wavelength of 10.6 micrometers. The same laser system may be used to produce the openings 24 in the layer 14 where necessary .

5 If the second illustrative material is to be produced, provision of the openings 24 is not necessary and it is not necessary to laminate the third layer to the first layer 12.

 Should the illustrative method be employed to produce the first illustrative material then it will be necessary to form the openings 24 and
10 to laminate the third layer 22 to the first layer as outlined above.

 In carrying out the illustrative method of making the first illustrative material it is necessary to form an air impermeable seal along the opposite lengthwise edges 16 of the sheet material produced and this
15 can be done by any convenient means, for example ultrasonic welding or high frequency welding, use of an impermeable tape folded round the edge and sealed to the second and third layers, heat sealing or any other suitable sealing system.

20 Where the illustrative materials are to be used to provide mattresses covers the width of the sheet material between the opposite edges 16 is conveniently between 85 and 150 cm, preferably between 85 cm and 120 cm. The region between the lines R in which the perforations are to be formed is suitably between 40 cm and 65 cm in width, preferably between
25 50 cm and 60 cm in width. Where openings 24 are formed in the second layer 14 they are conveniently closer to the perforated region R than the edges 16 of the fabric and the spacing between the openings is conveniently between 70 cm and 95 cm, preferably between 75 cm and 85 cm, depending on the width of the perforated region between the lines R.

Where one of the illustrative sheet materials is to be used as a cover for a mattress it is cut into discrete lengths, suitably between 140 cm and 360 cm in length and preferably between 210 cm and 250 cm in length.

5

For the first illustrative sheet material the transverse cut edges such as the edge 26 must be sealed together by any suitable means for example as used to seal the edges 16 in carrying out the illustrative method to create an airtight seal between the second and third layers. If desired the lengthwise edges 16 may also be sealed during manufacture of the cover instead of when making the first illustrative sheet material. For each such mattress cover there are conveniently five openings 24 along each side of the cover. Connecting means may be sealed to the layer 14 around the openings 24 to provide a supply of air under pressure to the openings 24.

15

In use of a cover comprising the first illustrative sheet material the cover is placed on a mattress with the second layer 14 uppermost and air under pressure is supplied to the openings 24. The air then permeates through the first layer between the second and third layers and the air escapes through any of the openings 18, 20 which are not completely closed by the patient's body. In mattress systems utilising pockets which are inflated sequentially, those of the perforations 18, 20 which are aligned with a deflated pocket will not be closed off by the patient's body which will be supported only by the inflated pockets and thus air can leak from the unclosed perforations 18, 20 to ventilate the exposed regions of the patient's body. When the previously deflated pockets are re-inflated the patient's body will be supported by the inflated pockets and the corresponding perforations 18, 20 will partially be closed by the patient's body but as others of the pockets deflate, those of the perforations 18, 20

25

corresponding with the deflated pockets will be open and ventilate the adjacent parts of a patient's body in this way. Thus, the whole of the patient's body can be ventilated in parts sequentially.

5 Because the air is supplied from edge regions of the covers formed from the first illustrative sheet material, there will be tend to be an air pressure drop across the material from the edge regions towards the centre. The perforations 20 in the centre therefore are of larger diameter than those perforations 18 closer to the edges 16 to facilitate an even
10 distribution of the air escaping from the perforations across the perforated region of the sheet material. If desired there can be perforations of several different diameters, the smallest diameter perforations being closest to the edges 16 and the perforations being of progressively larger diameter towards the centre of the sheet material. The sizes of the
15 perforations 18, 20 are chosen to provide the required air distribution in the use of the material.

20 The third layer of the first illustrative sheet material not only provides an air impermeable backing layer so that air introduced under pressure through the openings 24 is forced to escape through the perforations 18, 20 but also ensures that no body fluids leak through the cover sheet onto the underlying mattress, thus keeping the underlying mattress clean and sterile.

25 After use the cover sheet may be disposed of for hygiene reasons.

Although in the first illustrative sheet material, the openings 24 are provided in the second layer 14 for the introduction of air under pressure, the openings for introduction of air under pressure could if more

convenient, be formed in the third layer; however, this is not preferred for hygiene reasons.

The second illustrative sheet material comprising only the first and second layers may be used in forming an inflatable mattress cover by forming a cover of the second illustrative and sealing the cover sheet to an impermeable backing material around the lengthwise and transverse edges of the cover sheet to form an envelope with the second illustrative material forming one face. Air under pressure may then be introduced into the envelope formed between the cover sheet and the backing layer to inflate the envelope, the air under pressure leaking gradually from the perforations 18, 20 to ventilate the body of a patient lying on the cover.

In this case, where the second illustrative sheet material forms one side of an inflatable envelope, the perforations 18, 20 may all be of the same diameter or may vary in a manner similar to those of the first illustrative sheet material..

The region of the illustrative sheet material in which the perforations are formed are chosen to be of sufficient width to provide adequate ventilation to the bodies of patients who will lie on a cover sheet formed from the material.

Sheet materials generally similar to the illustrative materials can be used for purposes other than mattress covers as the sheet materials have an engineered permeability, the air permeability of the materials in accordance with the invention being able to be closely controlled in accordance with the end use requirements.

CLAIMS

1. A flexible sheet material comprising an air-permeable first layer and a second layer, the second layer being substantially air-impermeable but having a controlled air permeability at a selected part of the second layer.

2. A sheet material according to Claim 1 wherein the second layer is of uniform thickness and laminated to the first layer.

3. A sheet material according to Claim 2 wherein the second layer comprises an air-impermeable material having a set of perforations therethrough at the selected part.

4. A sheet material according to Claim 3 wherein the first layer is a textile material.

5. A sheet material according to either one of Claims 3 and 4 wherein the second layer is a polyurethane composition.

6. A sheet material according to any one of Claims 3 to 5 wherein the selected part comprises a first region and a second region and wherein the perforations are of different dimensions in the first region from those in the second region.

7. A sheet material according to Claim 6 wherein the perforations in the first region are larger than those in the second region.

8. A sheet material according to Claim 7 wherein the perforations in the first region each have a diameter between 0.1 mm and 0.6 mm and the perforations in the second region have a diameter between 0.2 mm and 1 mm.

5

9. A sheet material according to Claim 8 wherein the first region extends lengthwise along a central part of the sheet material and the second region extends lengthwise at either side of the central part.

10 10. A sheet material according to any one of the preceding claims comprising a third layer on a face of the first layer opposite that carrying the second layer, the third layer being air-impermeable and the first layer being permeable to air in a direction parallel to the surface of the sheet material and in a direction extending transversely to the surface of the
15 sheet material.

11. A sheet material according to Claim 10 wherein the third layer is a polyurethane composition.

20 12. A sheet material according to either one of Claims 10 and 11 comprising one or more openings in the second layer through which air under pressure can be supplied to the first layer.

13. A method of making a laminated sheet material comprising:-

- 25 (a) procuring an air permeable first layer;
- (b) procuring an air-impermeable second layer comprising a material of uniform thickness;
- (c) laminating the first and second layers to one another to provide said laminated sheet material; and

(d) forming a set of perforations through the second layer at a selected part thereof.

14. A method according to Claim 13 wherein the first layer is a textile
5 material.

15. A method according to either one of Claims 13 and 14 wherein the second layer is a polyurethane composition.

10 16. A method according to any one of Claims 13 to 15 wherein the perforations are made by perforating the second layer after the first and second layers have been laminated to one another.

17. A method according to any one of Claims 13 to 16 wherein the
15 perforations in a first region of the selected part are of different dimensions from those in a second region.

18. A method according to any one of Claims 13 to 17 comprising laminating a third layer to a face of the first layer opposite that to which
20 the second layer is laminated, the third layer being air-impermeable and of uniform thickness.

19. A method according to any one of Claims 13 to 18 wherein the
second layer is laminated with the first layer by transfer-coating.

25

20. A method according to any one of Claims 13 to 19 wherein the third layer is laminated with the first layer by transfer-coating.

21. A method according to any one of Claims 13 to 20 of making a laminated sheet material according to any one of Claims 1 to 12.

ABSTRACT

FLEXIBLE SHEET MATERIAL AND METHOD
OF MAKING SAME

5

A flexible, extensible, sheet material comprising an air-permeable first layer and a second layer, the second layer comprising an air-impermeable material of uniform thickness having a set of perforations therethrough at a selected part of the second layer. Conveniently, the material is made by a method of making a laminated sheet material comprising:-

10

15

- (a) procuring an air permeable first layer;
- (b) procuring an air-impermeable second layer comprising a material of uniform thickness;
- (c) laminating the first and second layers to one another to provide said laminated sheet material; and
- (d) forming a set of perforations therethrough at a selected part of the second layer.


20

The material may be used in protective covers for mattresses to provide ventilation of bodies of patients lying on the covers.


(Figure 1)

THIS PAGE BLANK (USPTO)

1/2

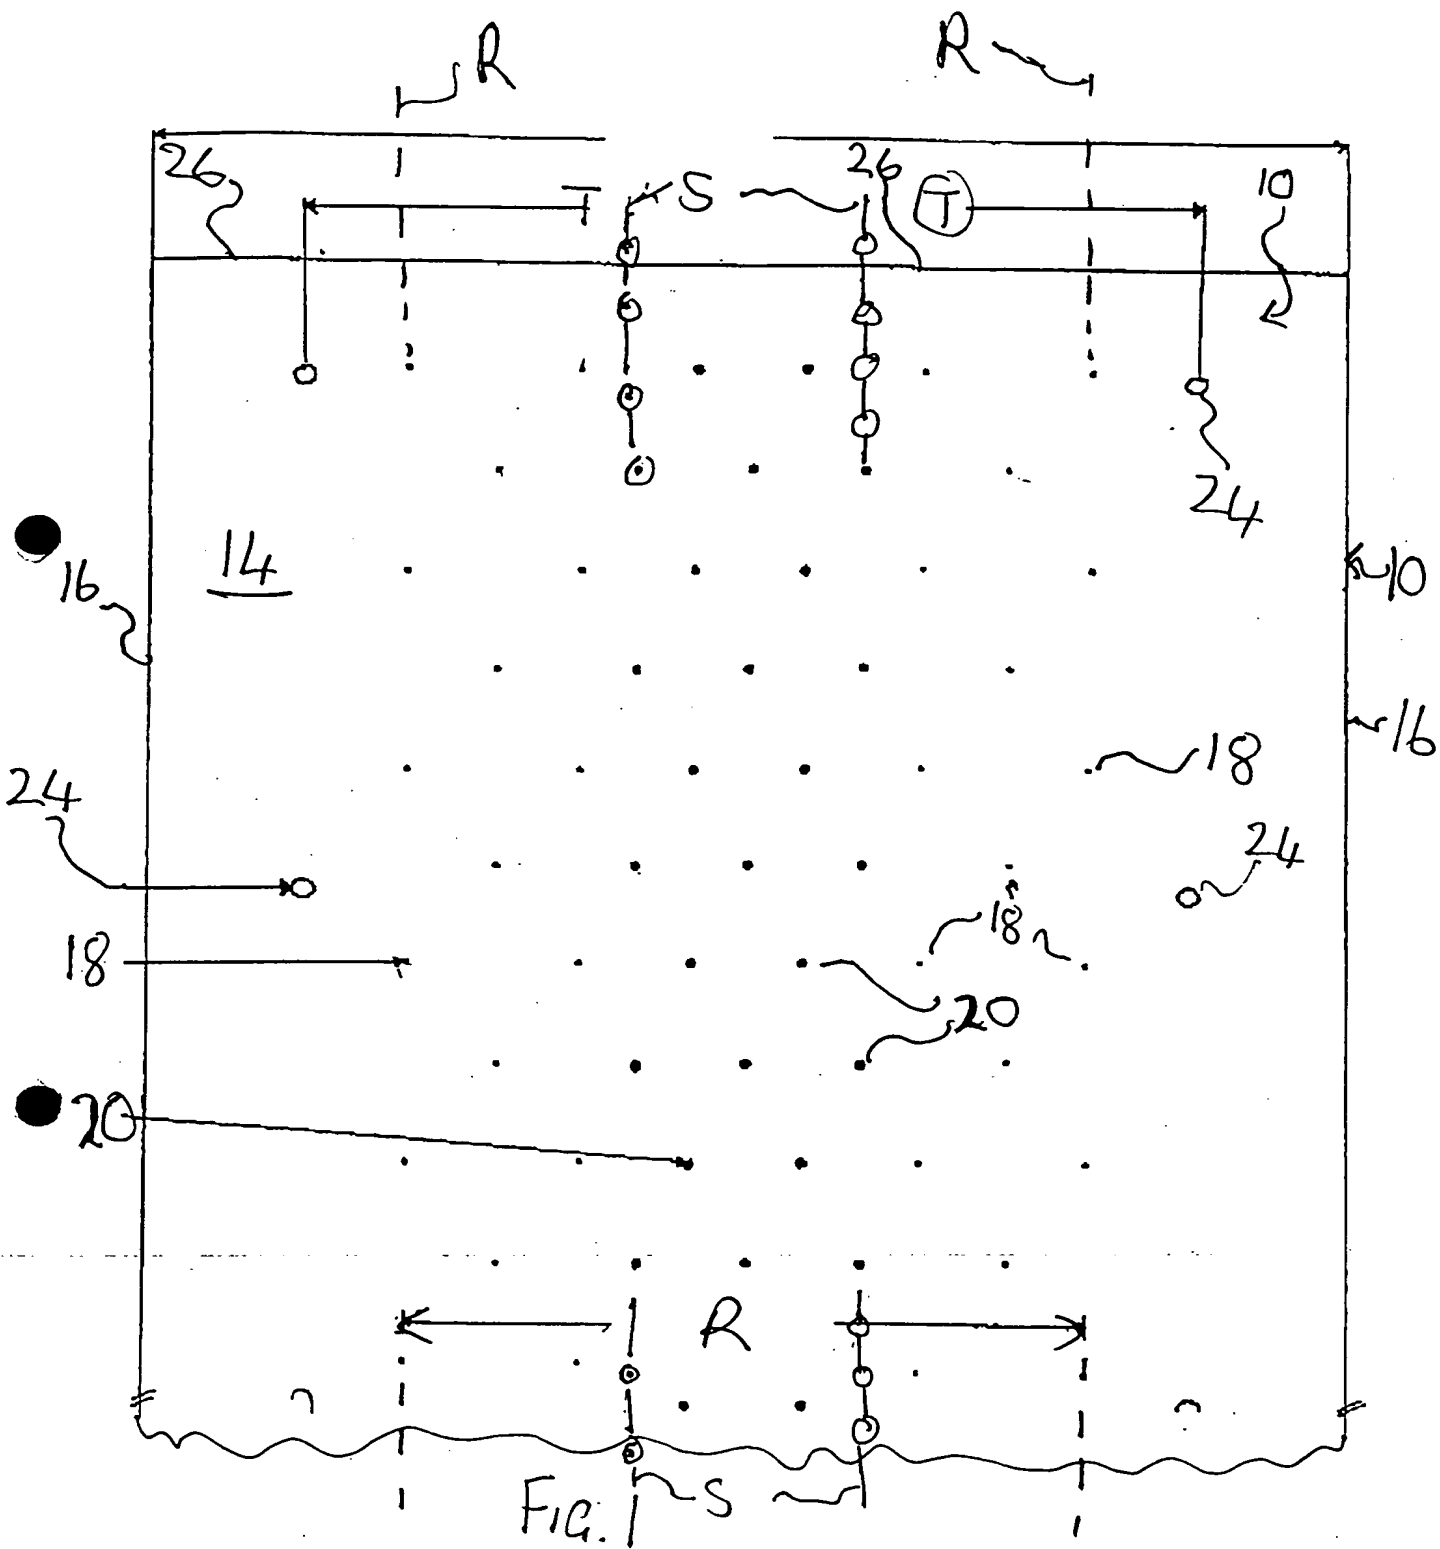

THIS PAGE BLANK (USPTO)

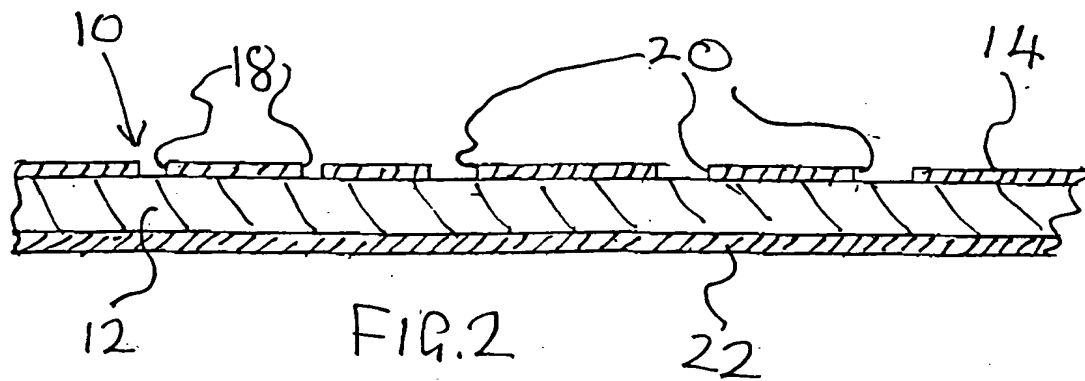

PCT/GB 99/01756 - 4 JUN '99

ERIC POTTER CLARKSON - 9812026.4

THIS PAGE BLANK (USPTO)